


Sarnafil Walkway Pad



Overview	Sarnafil walkway pad is a durable, traffic-bearing, heat-weldable rooftop walkway pad used on a Sarnafil roof system.	
Properties	Material	Sarnafil walkway pads are injection moulded. The material formula meets the same high standards for raw materials and durability met by time-tested Sarnafil G/S/F roofing membrane.
	Size	600 x 600 mm nonslip walking surface with a 75-mm weld tab at each end.
	Thickness	7 mm (including the 3-mm traction profiles).
	Colour	Dark grey
	Weight	2.3 kg per walkway pad
Notices	<ul style="list-style-type: none">• A herringbone pattern of 3 mm-high traction profiles provides a durable walking surface and fast water runoff .• Interlocking alignment tabs .• Weld tabs for making lap splices with almost any welder – right over the existing Sarnafil G/S/F roof .• Water-runoff channels in all directions on the underside.• Installation is fast and easy. The pads require no underlayment.	
Packaging	1 pad	

All data in our product information are based on our current knowledge and experience. They do not release users from careful testing of the application and strict observation of the relevant processing regulations because of the wide range of possible influences during the application and use of our products. Legally valid assurances of specific characteristics or suitability for special purposes of application other than those provided in our documentation for the specific product cannot be inferred from our information. The recipient or processor of our products at their own responsibility must follow any protective rights or existing laws and provisions. Moreover our general terms and conditions of sale and warranty are valid.

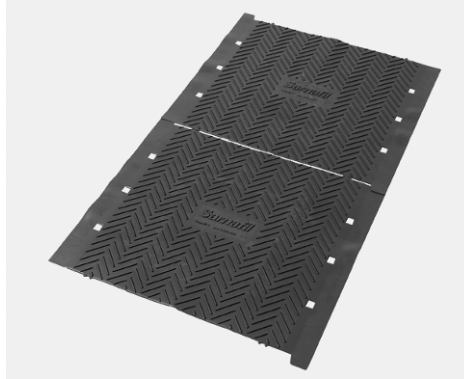